

TECHNICAL DATASHEET

EX Heavy Duty Absolute AX 65 - SSI



Extreme Robust Explosionproof absolute Encoder
ATEX and IECEx certification for Mining, Gas and Dust
300 N axial and radial load
Extreme shock and vibration resistant: 200 g shock; 30 g vibration
Most compact design of its class: 70 mm mounting depth; 59 mm diameter
Different terminal boxes with cage clamp terminals
Easy and fast field installation
Protection class up IP66/ IP67
Extreme corrosion resistance: high grade stainless steel housing (1.4404)
Applications: Winch, enamelling production line, petro chemistry, bottling machines, mixers, silo works, mills, cranes, drilling equipment



EX-CLASSIFICATION

The robust absolute shaft encoder line ACURO-XR is available in explosion proof design with explosion proof enclosure "Ex d" under AX 65.
It has been assured with the EC-TYPE-Examination Certificate IBEU10ATEX1172 X that the AX65 meets the requirements of safety and health according to EN 60079-0:2014-06, EN 60079-1:2015-04 and EN 60079-31:2014-12.
Additionally the encoder is certified according the IECEx standards IEC 60079-0:2011, ed. 6; IEC 60079-1:2014-6, ed. 7 and IEC 60079-31:2013, ed. 2. Assured according IECEx IBE 12.0017X certification.

Therefore it is approved in explosive areas,

Explosion protection classification

Gas: Ex II 2G Ex db IIC T4

Dust: Ex II 2D Ex tb IIIC T135 °C

Mining: Ex I M2 Ex db I

The AX 65 comes with a stainless steel housing. So its suitable for offshore applications, applications under tough environmental conditions and food industry.

TECHNICAL DATA
mechanical

Housing diameter	59 mm
Shaft diameter	10 mm (Solid shaft)
Flange (Mounting of housing)	Synchro clamping flange
Protection class shaft input (EN 60529/ A1:2000-02)	IP66/ IP67
Protection class housing (EN 60529/ A1:2000-02)	IP66/ IP67
Shaft load axial / radial	max.: 300 N / 300 N
Max. speed	3000 rpm, 6000 rpm (short term <1sec)
Nominal speed	1500 rpm
Starting torque typ.	≤ 4,5 Ncm

Specifications subject to change without notice.

Doc No: AE0032 Rev: 002	Impulse Automation Limited United Kingdom Company Registration 665193	Page
Edition: 3 200116 TK		1/5

TECHNICAL DATASHEET

EX Heavy Duty Absolute AX 65 - SSI

**TECHNICAL DATA
Mechanical (continued)**

Moment of inertia	approx. 25 gcm ²
Vibration resistance (DIN EN 60068-2-6:2008)	300m/s ² (50 ... 2000Hz)
Shock resistance (DIN EN 60068-2-27:2010)	2000m/s ² (3ms)
Ambient temperature	-40°C ... +60°C Ex db IIC T4 -40°C ... +60°C Ex tb IIIC T135°C / Ex db I
Storage temperature ¹	-20°C ... +85°C
Material Housing	Stainless Steel (1.4404)
Weight	1300g approx. (without cable)
Connection ²	Terminal box with 1 x M20x1,5 screw thread , axial or radial Terminal box with 2 x M20x1,5 screw thread, radial

¹ due to packing

² without cable gland

**TECHNICAL DATA
electrical**

Supply voltage	DC 10 - 30V
Current w/o load max.	200 mA
Recommended external fuse	T 0,2 A
Power consumption	max. 2 W
Resolution singleturn	12 Bit
Output code	Gray or Binary
Drives	Clock and Data / RS422
Absolute accuracy	±1°
Repeatability	±0,2°
Control inputs ²	Preset, Direction

¹ 13 Bit on request

**RECOMMENDED DATA TRANSFER
RATE for SSI**

The max. data transfer rate depends on the cable length. For Clock / Clock and Data / Data please use twisted pairs. Use shielded cable.

Cable length	Frequency
<25m	< 800 kHz
<50m	< 400 kHz
<100m	< 300 kHz
<200m	< 200 kHz
<400m	< 100 kHz

Specifications subject to change without notice.


Doc No: AE0032 Rev: 002	Impulse Automation Limited United Kingdom Company Registration 665193	Page
Edition: 3 200116 TK		2/5

TECHNICAL DATASHEET


EX Heavy Duty Absolute AX 65 - SSI

ELECTRICAL CONNECTIONS SSI

Color / printed numbers	Terminal block	Signal
white / 1	1	U in 10...30V DC
brown / 2	2	0V (GND Power supply)
green / 3	3	Clock
yellow / 4	4	Clock
grey / 5	5	Data
pink / 6	6	Data
blue / 7	7	Direction
red / 8	8	Preset (set to zero)
	9	Not connected
	10	PE
Screen		cable screen connected to housing
Terminal screw		for additional connection of an earth conductor

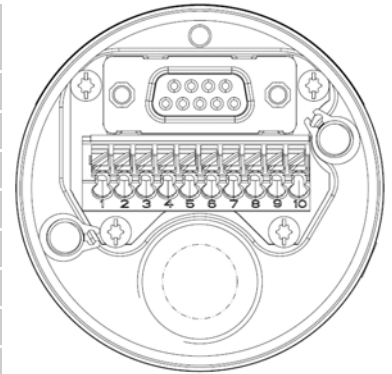

DIMENSIONED DRAWINGS

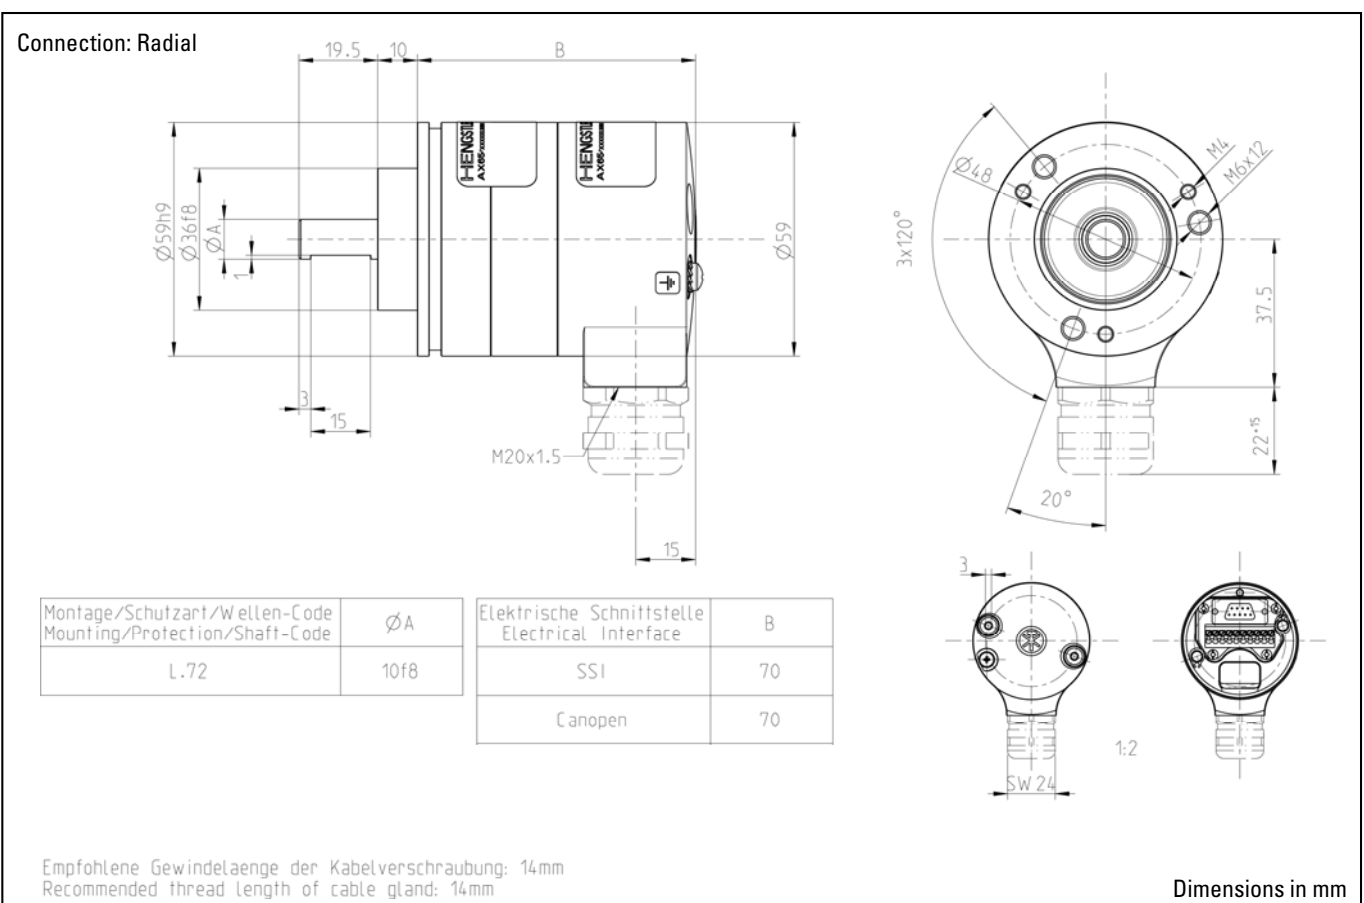

Specifications subject to change without notice.

Doc No: AE0032 Rev: 002	Impulse Automation Limited United Kingdom Company Registration 665193	Page 3/5
Edition: 3 200116 TK		

Art. No.: 2 569 031


Information shown in these data sheets are for guidance purposes only, no liability is accepted for any errors or omissions. The designer or user is solely responsible for the safe and proper use of these parts, assemblies or equipment described.

TECHNICAL DATASHEET


EX Heavy Duty Absolute AX 65 - SSI

DIMENSIONED DRAWINGS (continued)

Connection:
Radial double

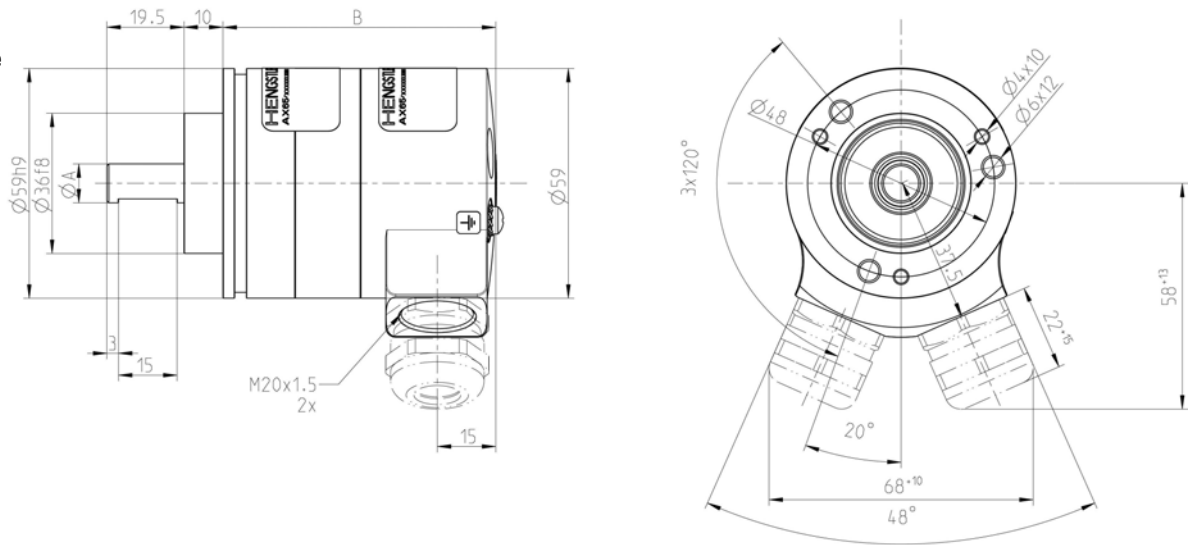


Montage/Schutzart/Wellen-Code Mounting/Protection/Shaft-Code	Ø A	Elektrische Schnittstelle Electrical Interface	B
L.72	10f8	SSI	70
		Canopen	70

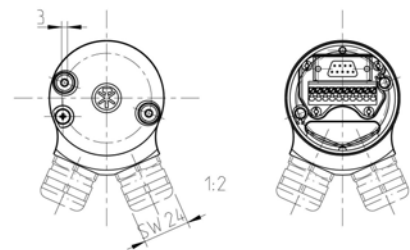


Empfohlene Gewindelaenge der Kabelverschraubungen: 14mm
Recommended thread length of cable glands: 14mm

Dimensions in mm

Connection: Axial

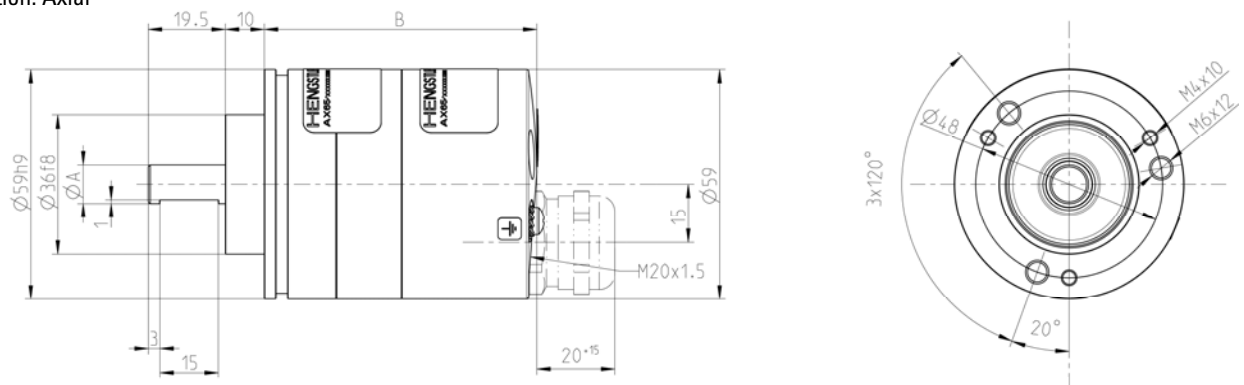

Montage/Schutzart/Wellen-Code Mounting/Protection/Shaft-Code	Ø A	Elektrische Schnittstelle Electrical Interface	B
L.72	10f8	SSI	70
		Canopen	70



Empfohlene Gewindelaenge der Kabelverschraubung: 14mm
Recommended thread length of cable gland: 14mm

Dimensions in mm

Doc No: AE0032 Rev: 002

Edition: 3 200116 TK

Impulse Automation Limited
United Kingdom
Company Registration 665193

Page

4/5

Art. No.: 2 569 031

Information shown in these data sheets are for guidance purposes only, no liability is accepted for any errors or omissions.
The designer or user is solely responsible for the safe and proper use of these parts, assemblies or equipment described.

TECHNICAL DATASHEET

EX Heavy Duty Absolute AX 65 - SSI

ORDERING INFORMATION
SSI

Type	Resolution	Supply voltage	Flange, Protection, Shaft	Interface	Connection
<input type="checkbox"/> / <input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
AX65	0012 12 Bit ST	E DC 10 - 30 V	L.72 Synchro clamping, IP66/ IP67, 10 mm	SG SSI Gray SB SSI Binary	0 1 x M20x1,5 screw thread, axial 1 1 x M20x1,5 screw thread, radial 2 2 x M20x1,5 screw thread, radial

Specifications subject to change without notice.

Doc No: AE0032 Rev: 002	Impulse Automation Limited United Kingdom Company Registration 665193	Page
Edition: 3 200116 TK		5/5